

CCP01 PU Anti-Bacterial

Anti-Bacterial Cold Room Panel · CCP01 AB

0.022

W/mK thermal conductivity

60 - 200

mm core thickness

1000 / 1050


mm cover width

15.5

m maximum length

PRODUCT DESCRIPTION

CCP01 PU Anti-Bacterial is a cold room panel with an anti-bacterial coating on its inner face. The coating is chosen for spaces where food production and storage require hygiene.

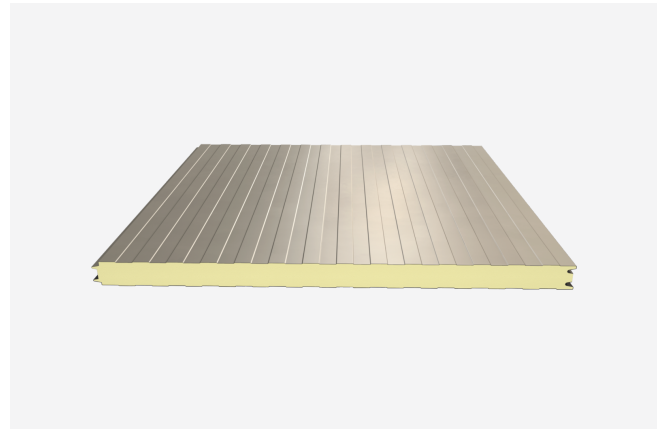

TECHNICAL PROPERTIES

Core material	PUR-PIR
Fire class	B-s1-d0
Thermal conductivity	0.022 W/mK
Core thicknesses	60 mm · 70 mm · 80 mm · 100 mm · 120 mm · 200 mm
Facing options	Polyester · PVDF · Plastisol · DPF
Steel thicknesses	0.45 mm x 0.35 mm · 0.50 mm x 0.40 mm · 0.60 mm x 0.50 mm · 0.60 mm x 0.60 mm · 0.70 mm x 0.60 mm · 0.80 mm x 0.70 mm
Company certificates	ISO 9001 · ISO 14001 · ISO 45001 · TSE · YMB · CE

Panel PUR ya da PIR çekirdeklerle üretilir; sınıf PIR çekirdek içindir. PUR çekirdeklerle B-s2-d0'dır.

DIMENSIONS

DESIGN	COVER WIDTH	THICKNESS	MAXIMUM LENGTH
Mikro Hadve	1000 / 1050 mm	60 - 200 mm	15.5 m

FACING MATERIAL

EN 10143 · EN 10327

FACE	MATERIAL	THICKNESS	GRADE	GALVANISING
Outer	Steel sheet	0.45 - 0.80 mm	DX 51	100 - 110 gr/m ²
Inner	Steel sheet	0.35 - 0.70 mm	DX 51	100 - 110 gr/m ²

CORE MATERIAL

TS EN 14509 · TS EN 12667 · TS EN 13501-1

MATERIAL	DENSITY	THICKNESS	THERMAL CONDUCTIVITY	FIRE CLASS
PUR-PIR	38-40 kg/m ³ PUR	60 - 200 mm	0.022 W/mK	B-s1-d0

COATING

	REVERSE SIDE	PRIMER	TOP COAT	TOTAL FRONT
Polyester	7 microns	5 microns	20 microns	25 microns

STANDARD COLOURS



3020

5010

7016

9002


9006

Custom colours are produced from the RAL range.

PANEL SECTION



JOINT DETAIL

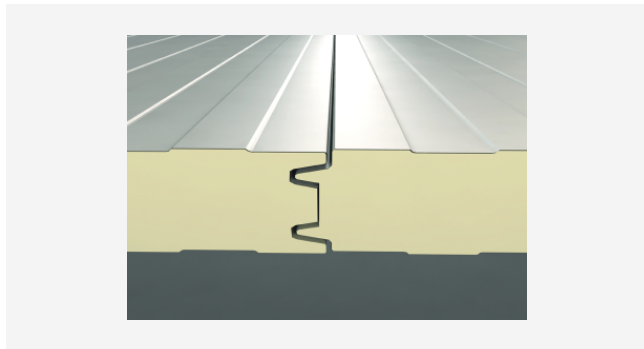

FOR INFORMATION

www.nuhpanel.com.tr

+90 262 751 07 79

This technical data sheet has been prepared according to the current technical information and standards of Nuhpanel Yapı Elemanları Sanayi Ticaret A.Ş. (Gebze, Kocaeli). The right to make technical changes is reserved.



Product page