

RENOBOARD 30

Renoboard 30 Roof Renovation Board · RB 30

0.022

W/mK thermal conductivity

30

mm core thickness

1200

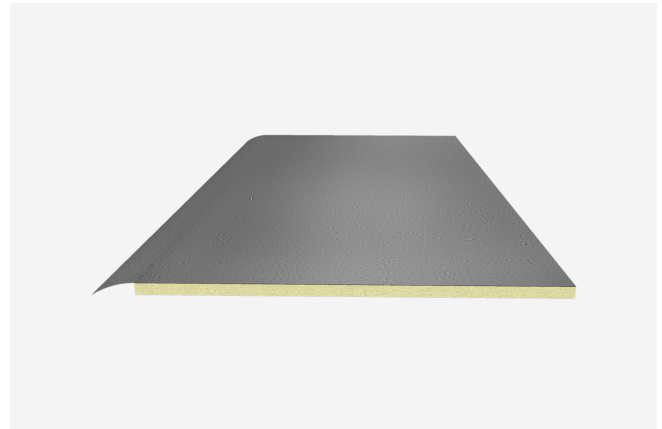
mm cover width

6

m maximum length

PRODUCT DESCRIPTION

RENOBOARD 30 is a renovation board applied over an existing roof. The old covering is not removed; the board is laid directly on top of it.



TECHNICAL PROPERTIES

Core material	PIR
Fire class	B-s1-d0 (sistem)
Thermal conductivity	0.022 W/mK
Core thicknesses	30 mm
Facing options	PVC · TPO · PVC-EVA
Company certificates	ISO 9001 · ISO 14001 · ISO 45001 · TSE · YMB · CE

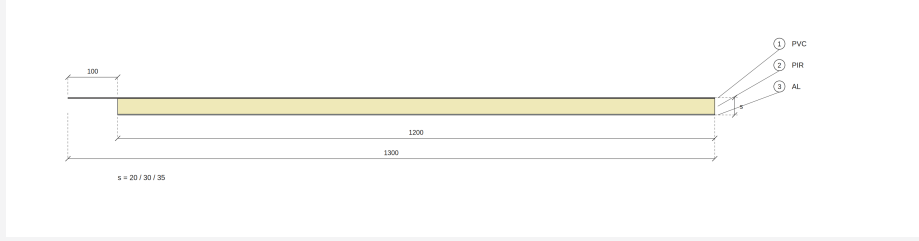
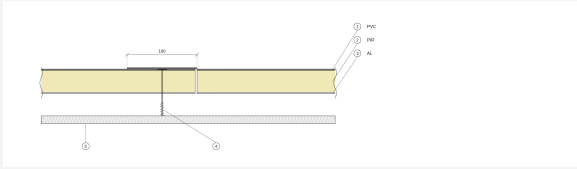
DIMENSIONS

DESIGN	COVER WIDTH	THICKNESS	MAXIMUM LENGTH
Düz Yüzey	1200 mm	30 mm	6 m

CORE MATERIAL

TS EN 14509 · TS EN 12667 · TS EN 13501-1

MATERIAL	DENSITY	THICKNESS	THERMAL CONDUCTIVITY	FIRE CLASS
PIR	48-52 kg/m ³ PIR	30 mm	0.022 W/mK	B-s1-d0 (sistem)

PANEL SECTION**JOINT DETAIL****FOR INFORMATION**

www.nuhpanel.com.tr

+90 262 751 07 79

This technical data sheet has been prepared according to the current technical information and standards of Nuhpanel Yapı Elemanları Sanayi Ticaret A.Ş. (Gebze, Kocaeli). The right to make technical changes is reserved.



Product page