

RENOPAN MEMBRANE PU

Renopan Membrane PU Roof Renovation Panel · NWPO PU

0.022

W/mK thermal conductivity

40 - 100

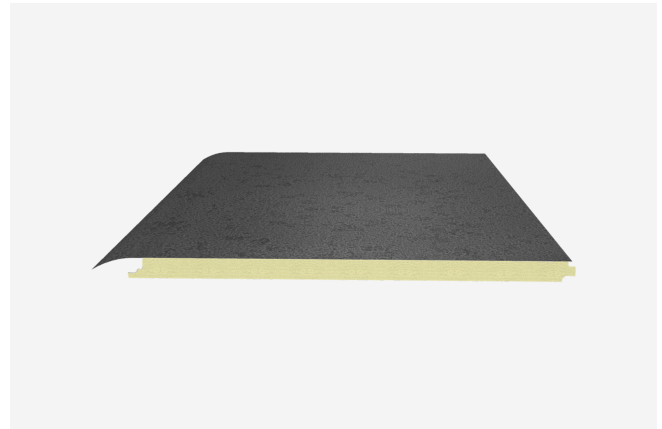
mm core thickness

1000

mm cover width

PRODUCT DESCRIPTION

RENOPAN MEMBRANE is a renovation panel applied over an existing roof without removing the old covering. The membrane is laminated onto the steel sheet in the factory; no separate waterproofing layer is laid on site.



TECHNICAL PROPERTIES

Core material	PUR-PIR
Fire class	B-s2-d0
Thermal conductivity	0.022 W/mK
Core thicknesses	40 mm · 50 mm · 60 mm · 70 mm · 80 mm · 100 mm
Facing options	PVC · TPO
Company certificates	ISO 9001 · ISO 14001 · ISO 45001 · TSE · YMB · CE

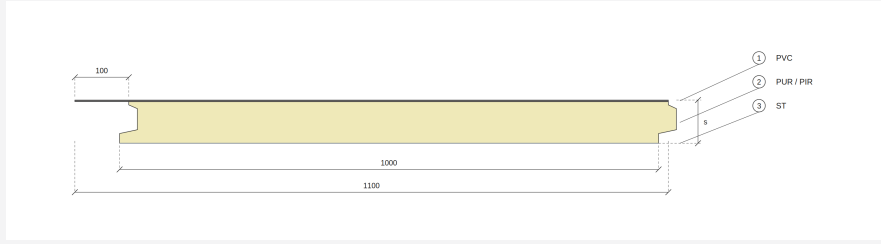
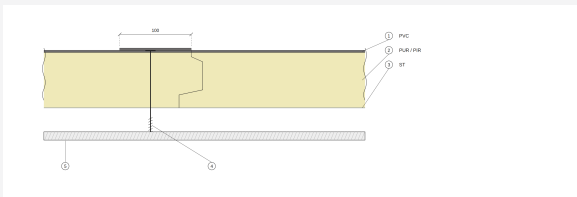
DIMENSIONS

DESIGN	COVER WIDTH	THICKNESS
Düz Yüzey	1000 mm	40 - 100 mm

CORE MATERIAL

TS EN 14509 · TS EN 12667 · TS EN 13501-1

MATERIAL	DENSITY	THICKNESS	THERMAL CONDUCTIVITY	FIRE CLASS
PUR-PIR	40 kg/m ³ (±2) poliüretan	40 - 100 mm	0.022 W/mK	B-s2-d0

PANEL SECTION**JOINT DETAIL****FOR INFORMATION**

www.nuhpanel.com.tr

+90 262 751 07 79

This technical data sheet has been prepared according to the current technical information and standards of Nuhpanel Yapı Elemanları Sanayi Ticaret A.Ş. (Gebze, Kocaeli). The right to make technical changes is reserved.



Product page