

SIDING WALL CLADDING

SIDING 1000 Hybrid

Siding 1000 Hybrid Wall Cladding Panel · NWP00-SD-1000 HR

0.045

W/mK thermal conductivity

40 - 60

mm core thickness

1000


mm cover width

15.5

m maximum length

PRODUCT DESCRIPTION

SIDING 1000 Hybrid is a decorative wall panel with a ribless flat surface. It gives an uninterrupted surface on the façade.

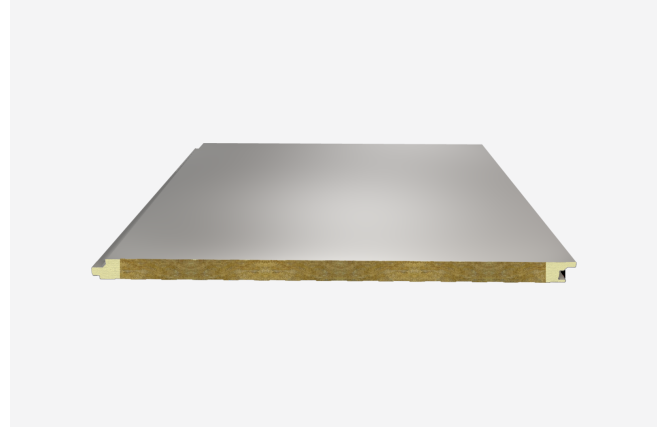

TECHNICAL PROPERTIES

Core material	Hybrid
Fire class	A2-s1-d0
Thermal conductivity	0.045 W/mK
Core thicknesses	40 mm · 50 mm · 60 mm
Facing options	Polyester · PVDF · Plastisol · DPF
Steel thicknesses	0.45 mm x 0.35 mm · 0.50 mm x 0.40 mm · 0.60 mm x 0.50 mm · 0.60 mm x 0.60 mm · 0.70 mm x 0.60 mm · 0.80 mm x 0.70 mm
Company certificates	ISO 9001 · ISO 14001 · ISO 45001 · TSE · YMB · CE

Hibrit çekirdekte taşıyıcı lameller poliüretanla birlikte kullanılır; sınıf taşıyıcısına göre verilir.

DIMENSIONS

DESIGN	COVER WIDTH	THICKNESS	MAXIMUM LENGTH
Düz Yüzey	1000 mm	40 - 60 mm	15.5 m

FACING MATERIAL

EN 10143 · EN 10327

FACE	MATERIAL	THICKNESS	GRADE	GALVANISING
Outer	Steel sheet	0.45 - 0.80 mm	DX 51	100 - 110 gr/m ²
Inner	Steel sheet	0.35 - 0.70 mm	DX 51	100 - 110 gr/m ²

CORE MATERIAL

TS EN 14509 · TS EN 12667 · TS EN 13501-1

MATERIAL	DENSITY	THICKNESS	THERMAL CONDUCTIVITY	FIRE CLASS
Hybrid	90-130 kg/m ³ taşıyünü	40 - 60 mm	0.045 W/mK	A2-s1-d0

COATING

	REVERSE SIDE	PRIMER	TOP COAT	TOTAL FRONT
Polyester	7 microns	5 microns	20 microns	25 microns

STANDARD COLOURS



3020

5010


7016


9002

9006

Custom colours are produced from the RAL range.

PANEL SECTION

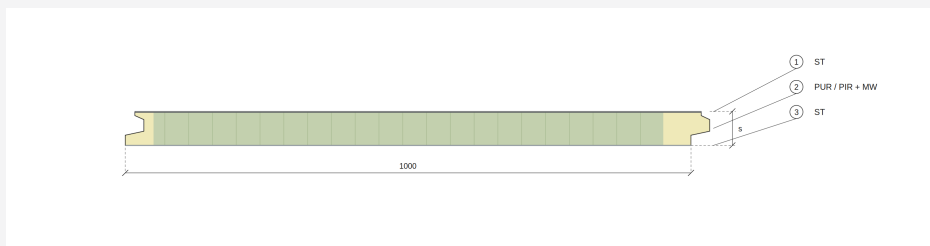

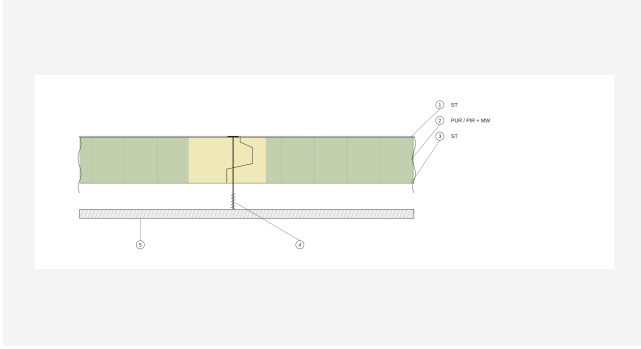JOINT DETAIL**FOR INFORMATION**

www.nuhpanel.com.tr

+90 262 751 07 79

This technical data sheet has been prepared according to the current technical information and standards of Nuhpanel Yapı Elemanları Sanayi Ticaret A.Ş. (Gebze, Kocaeli). The right to make technical changes is reserved.



Product page