

TRIPAN PU

TRIPAN PU Core Roof Panel · NRP5 - SSM PU

0.022

W/mK thermal conductivity

40 - 200

mm core thickness

1000


mm cover width

15.5

m maximum length

PRODUCT DESCRIPTION

TRIPAN PU is a five-rib roof panel whose outer sheet is laminated with a PVC membrane. The membrane is not a layer bonded on afterwards: the galvanised sheet and the membrane are joined on a separate lamination line at 220 degrees centigrade and become a single layer.

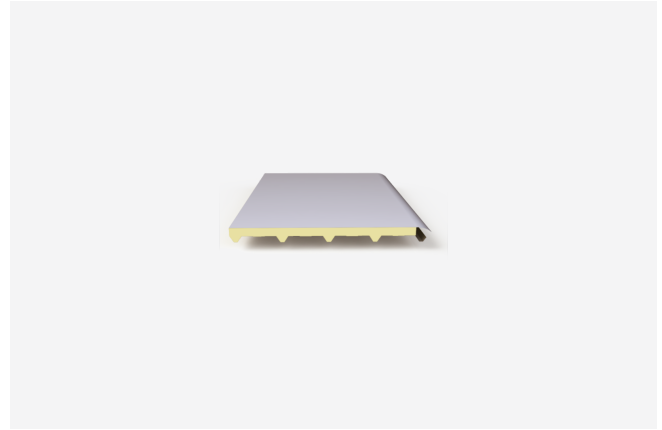

TECHNICAL PROPERTIES

Core material	PUR-PIR
Fire class	B-s1-d0
Thermal conductivity	0.022 W/mK
Core thicknesses	40 mm · 50 mm · 60 mm · 70 mm · 80 mm · 100 mm · 120 mm · 150 mm · 180 mm · 200 mm
Facing options	Polyester · PVDF · Plastisol · PVC
Steel thicknesses	0.45 mm x 0.35 mm · 0.50 mm x 0.40 mm · 0.60 mm x 0.50 mm · 0.60 mm x 0.60 mm · 0.70 mm x 0.60 mm · 0.80 mm x 0.70 mm
Company certificates	ISO 9001 · ISO 14001 · ISO 45001 · TSE · YMB · CE

Panel PUR ya da PIR çekirdeklerle üretilir; sınıf PIR çekirdek içindir. PUR çekirdeklerle B-s2-d0'dır.

DIMENSIONS

DESIGN	COVER WIDTH	THICKNESS	MAXIMUM LENGTH
5 Hadveli	1000 mm	40 - 200 mm	15.5 m

FACING MATERIAL

EN 10143 · EN 10327

FACE	MATERIAL	THICKNESS	GRADE	GALVANISING
Outer	PVC + steel	0.30 + 0.80 mm	PVC laminated steel	100 - 110 gr/m ²
Inner	Steel sheet	0.35 - 0.70 mm	DX 51	100 - 110 gr/m ²

CORE MATERIAL

TS EN 14509 · TS EN 12667 · TS EN 13501-1

MATERIAL	DENSITY	THICKNESS	THERMAL CONDUCTIVITY	FIRE CLASS
PUR-PIR	38-40 kg/m ³ PIR	40 - 200 mm	0.022 W/mK	B-s1-d0

COATING

	REVERSE SIDE	PRIMER	TOP COAT	TOTAL FRONT
Polyester	7 microns	5 microns	20 microns	25 microns

THERMAL TRANSMITTANCE AND WEIGHT

THICKNESS	U (W/m ² K)	WEIGHT (kg/m ²)	THICKNESS	U (W/m ² K)	WEIGHT (kg/m ²)
40 mm	0.51	9.5	100 mm	0.21	11.9
50 mm	0.41	9.9	120 mm	0.18	12.7
60 mm	0.35	10.3	150 mm	0.14	13.9
70 mm	0.30	10.7	180 mm	0.12	15.1
80 mm	0.26	11.1	200 mm	0.11	15.9

The U-value is calculated for the panel section with the surface resistances of EN ISO 6946; the fastener correction depends on the project. The weight is the nominal value for a panel with 0.50/0.50 mm steel facings.

STANDARD COLOURS



3020

5010


7016


9002

9006

Custom colours are produced from the RAL range.

PANEL SECTION

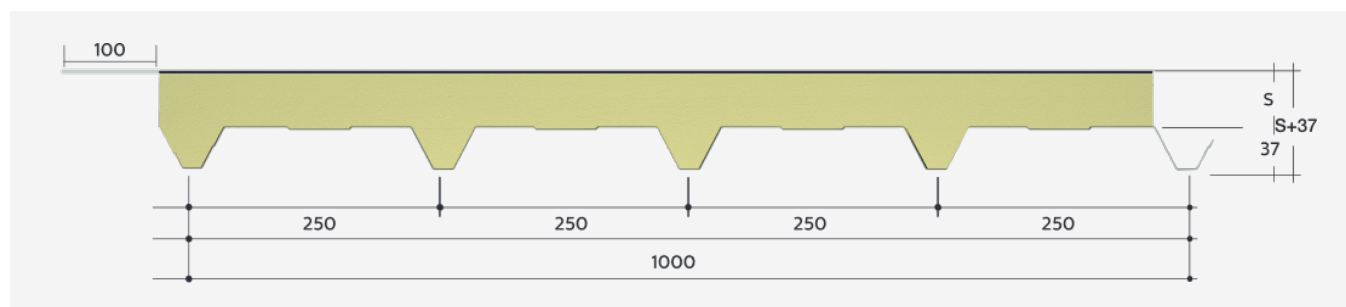

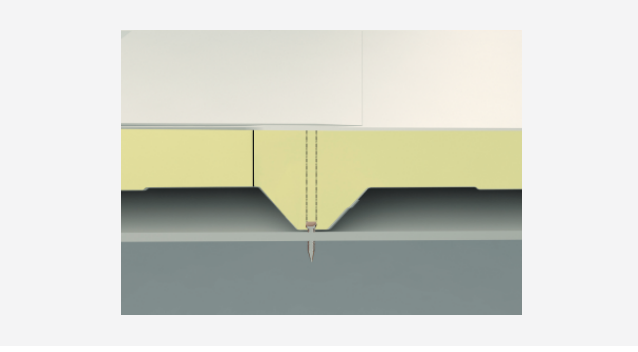JOINT DETAIL**FOR INFORMATION**

www.nuhpanel.com.tr

+90 262 751 07 79

This technical data sheet has been prepared according to the current technical information and standards of Nuhpanel Yapı Elemanları Sanayi Ticaret A.Ş. (Gebze, Kocaeli). The right to make technical changes is reserved.



Product page